



www.radio-workshop.co.uk

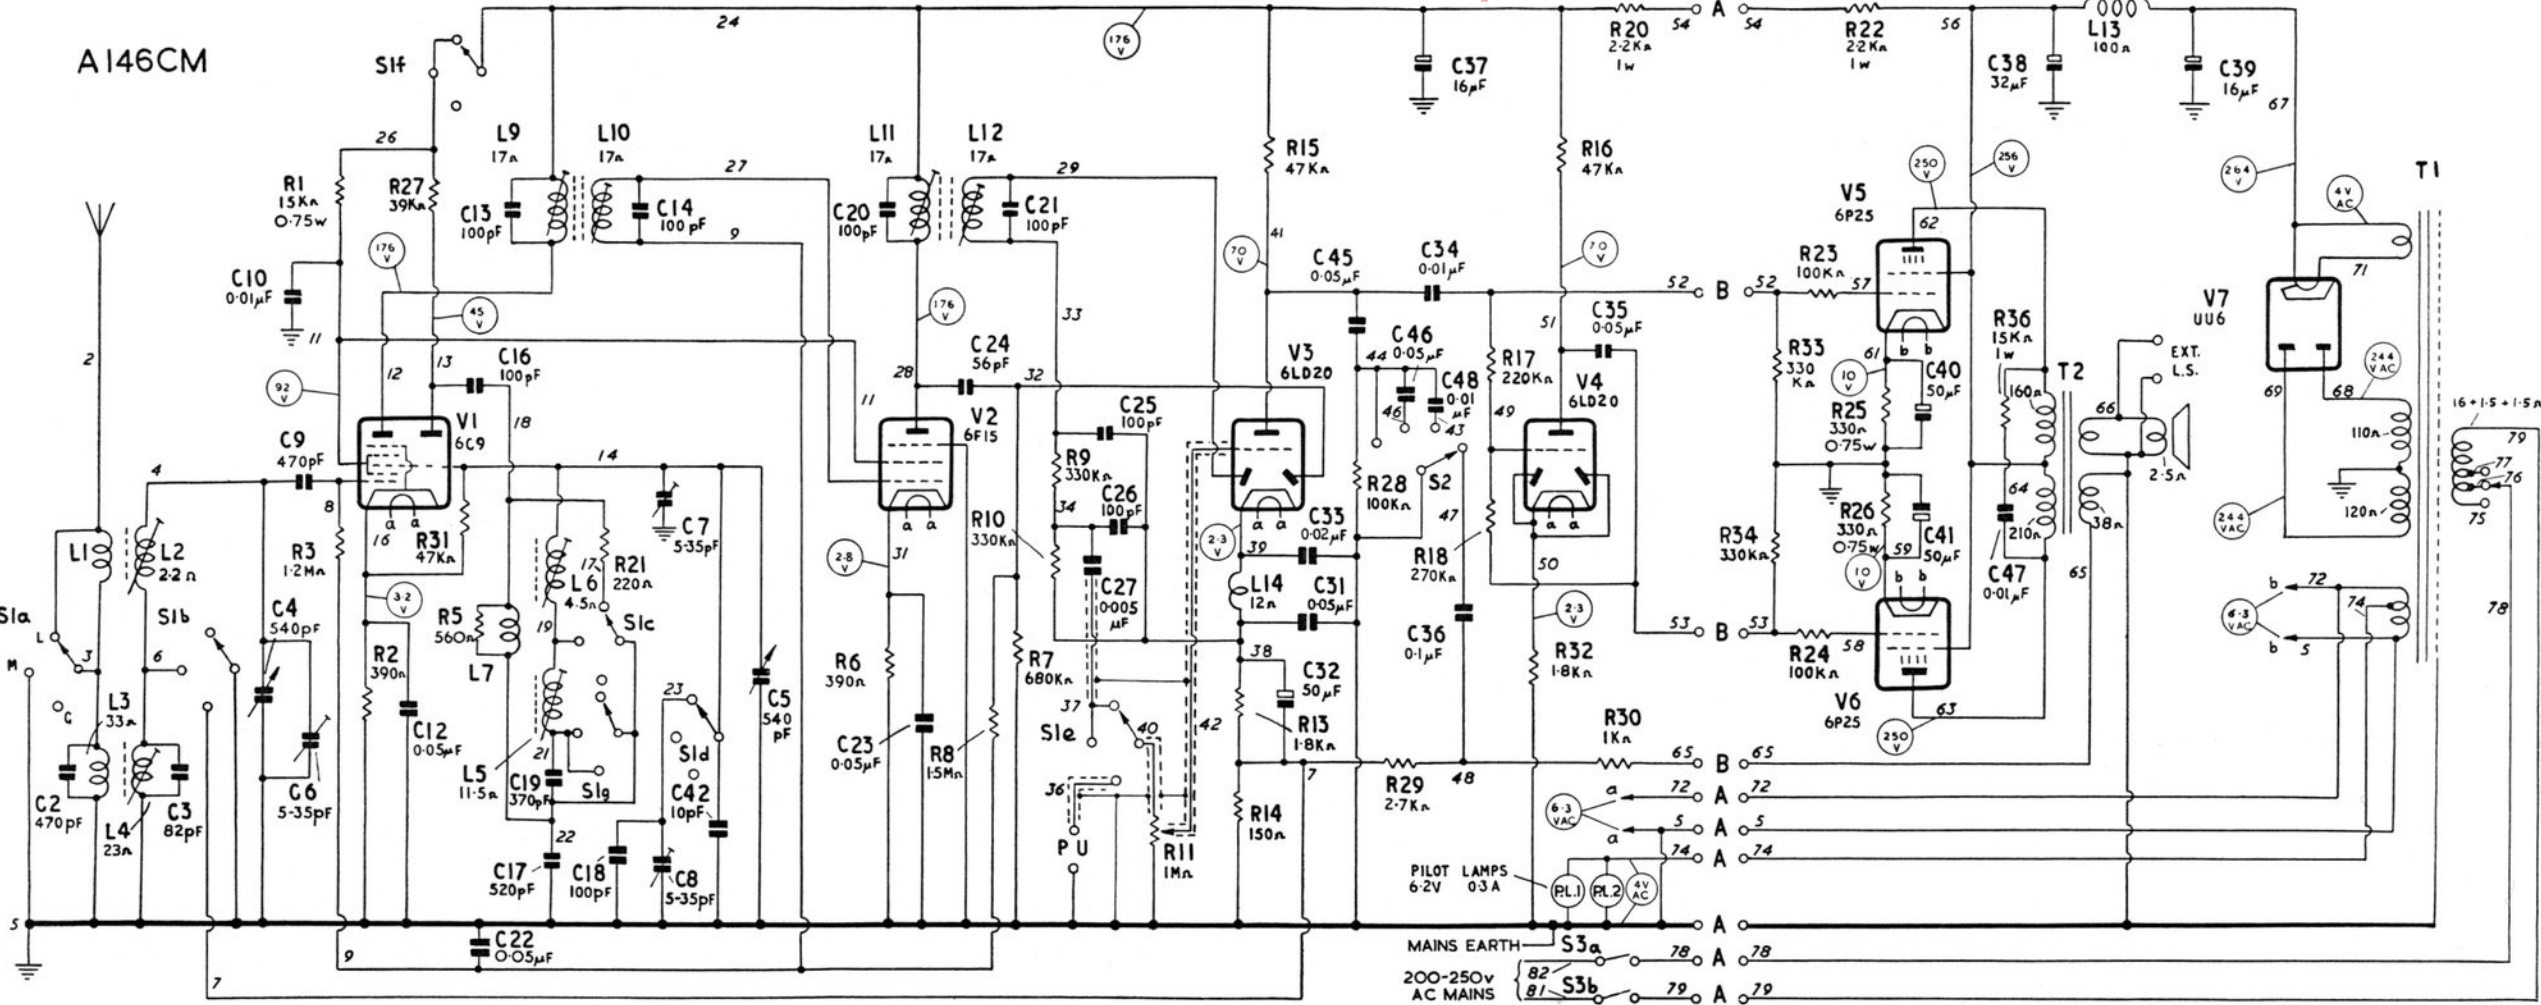

SUBJECT TO ALTERATION WITHOUT NOTICE ISSUE A

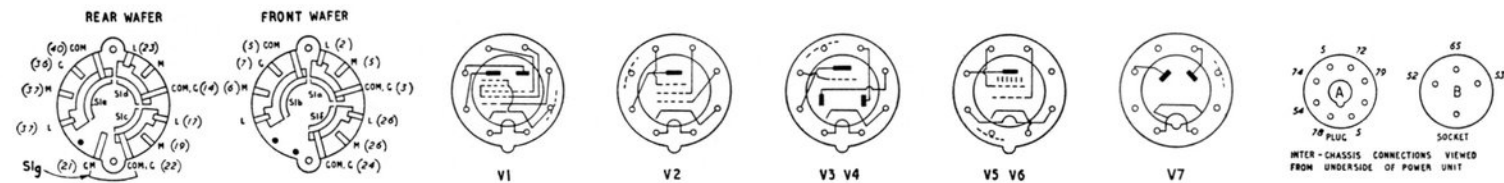

A 500 ohm/volt meter was used for taking the voltage readings; the receiver was switched to the medium wave band and operating under "no signal" conditions. In those cases where the resistance of a coil is omitted, the value is less than one ohm. The wave band switch is shown in the long wave position; the wafers are drawn as seen from the rear of the chassis.

Fig. 4.